


## PPS1 TR - Aluminium reducing tee fitting



<p><b><u>For pipe OD (mm)</u></b></p> <p>16</p>	<p><b><u>Technology</u></b></p> <p>PPS Grip Concept</p>	<p><b><u>Operating pressure</u></b></p> <p>0 to 16 bar</p>	<p><b><u>Vacuum capability</u></b></p> <p>-0.98 bar (vacuum 98%)</p>
<p><b><u>Temperature</u></b></p> <p>-20°C to +80°C</p>	<p><b><u>Construction</u></b></p> <p>Pipe and fittings: alu.</p>	<p><b><u>Highlight</u></b></p> <p>Scalable system</p>	<p><b><u>Meets standards</u></b></p> <p>PED REACH</p>

Description	
Reference	For pipe OD (mm)
PPS1 TR2016	16
PPS1 TR2516	16
PPS1 TR2520	20
PPS1 TR3216	16
PPS1 TR3220	20
PPS1 TR3225	25

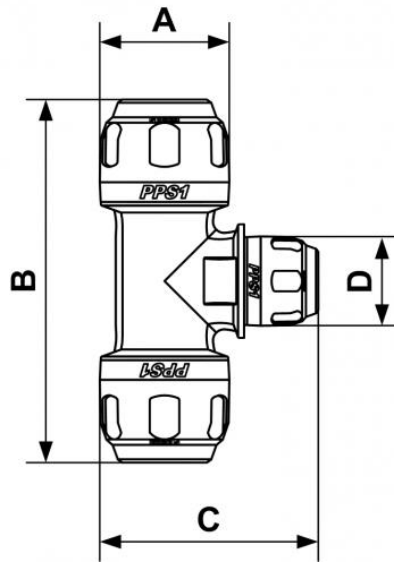

### Dimensions

Reference	A mm	B mm	C mm	D mm
<b>PPS1 TR2016</b>	66	108	38	32
<b>PPS1 TR2516</b>	78	131	46	32
<b>PPS1 TR2520</b>	83	131	46	38
<b>PPS1 TR3216</b>	91	155	57	32
<b>PPS1 TR3220</b>	96	155	57	38
<b>PPS1 TR3225</b>	102	155	57	46